


Coiltronics FP0906

High Frequency, High Current Power Inductors

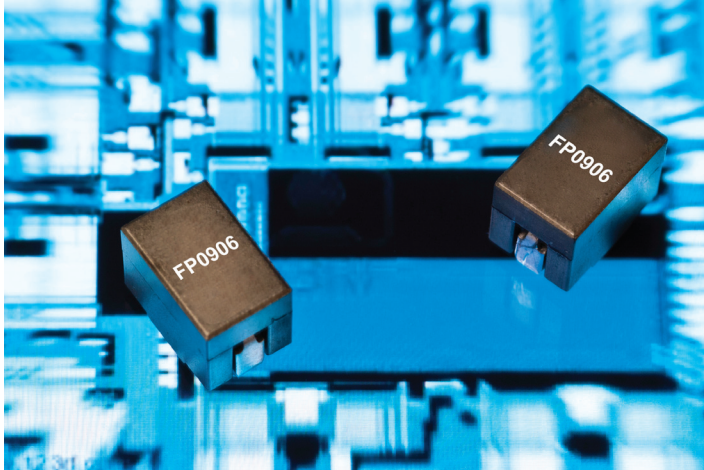

Product description:

- Halogen free, lead free, RoHS compliant
- 125°C Maximum total temperature operation
- 9.6 x 6.4 x 8.0mm maximum surface mount package
- Ferrite core material
- High current carrying capacity, low core losses
- Controlled DCR tolerance for sensing circuits
- Inductance Range from 100nH to 300nH
- Current range from 32.5 to 94 amps
- Frequency range up to 2MHz

Applications:

- Multi-phase regulators
- Voltage Regulator Module (VRM)
- Desktop and server VRMs and EVRDs
- Data networking and storage systems
- Graphics cards and battery power systems
- Point-of-load modules
- Notebook regulators
- DCR Sensing

Environmental data:

- Storage temperature range (component): -40°C to +125 °C
- Operating temperature range: -40°C to +125°C (ambient + self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Packaging:

- Supplied in tape and reel packaging, 600 parts per 13" diameter reel



Powering Business Worldwide



The Coiltronics brand of magnetics (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.

Coiltronics is now part of Eaton
Same great products plus even more.

Product specifications

Part Number ⁷	OCL ¹ ± 10% (nH)	FLL ² Min. (nH)	I_{rms}^3 (Amps)	I_{sat}^1 (Amps)	I_{sat}^2 (Amps)	DCR (mΩ) @ 20°C	K-factor ⁶
FP0906R1-R10-R	100	72	51	94	81.0	0.29±5%	451
FP0906R1-R12-R	120	86		79	68.0		451
FP0906R1-R15-R	150	108		65	54.5		451
FP0906R1-R22-R	220	155		44	37.5		451
FP0906R1-R28-R	280	200		34	29.0		451
FP0906R1-R30-R	300	216		32.5	27.5		451

1 Open Circuit Inductance (OCL) Test Parameters: 100kHz, 1.0V_{rms}, 0.0Adc @ 25°C

2 Full Load Inductance (FLL) Test Parameters: 100kHz, 1.0V_{rms}, I_{sat}^1 @ 25°C

3 I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents. PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

4 I_{sat}^1 : Peak current for approximately 20% rolloff at +25°C.

5 I_{sat}^2 : Peak current for approximately 20% rolloff at +125°C.

6 K-factor: Used to determine Bp-p for core loss (see graph).

$B_{pp} = K * L * DI * 10^{-3}$, B_{pp} : (Gauss), K: (K-factor from table), L: (inductance in nH), DI (peak-to-peak ripple current in amps).

7 Part Number Definition: FP0906Rx-Rxx-R


- FP0906 = Product code and size

- Rx is the DCR indicator

- Rxx= Inductance value in μH, R = decimal point

- "-R" suffix = RoHS compliant

Dimensions - mm

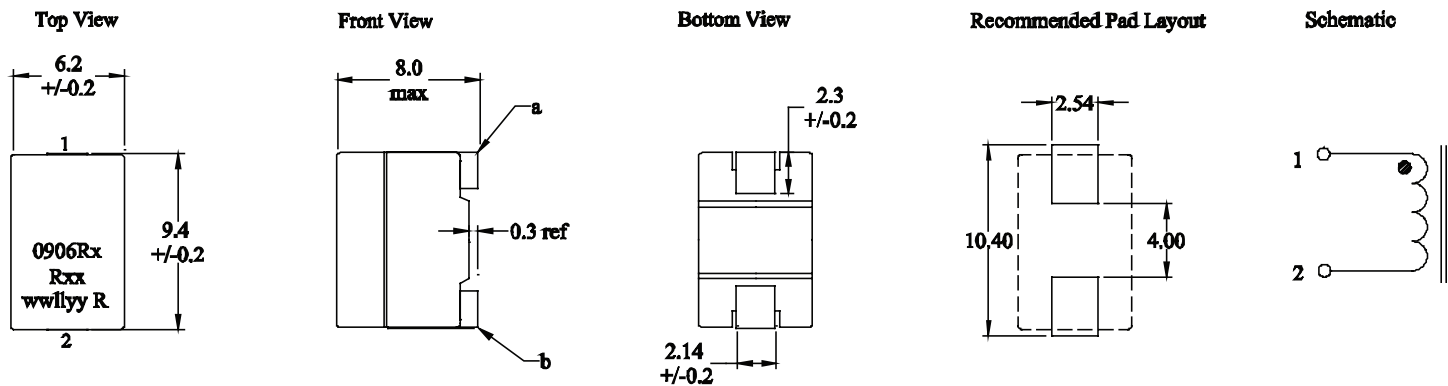


The nominal DCR is measured between point "a" and point "b."

Part marking: 0906Rx (Rx = DCR indicator), Rxx = Inductance value in μH, wwlllyy = date code, R = revision level.


Soldering surfaces to be coplanar within 0.1 millimeters.

Packaging information - mm


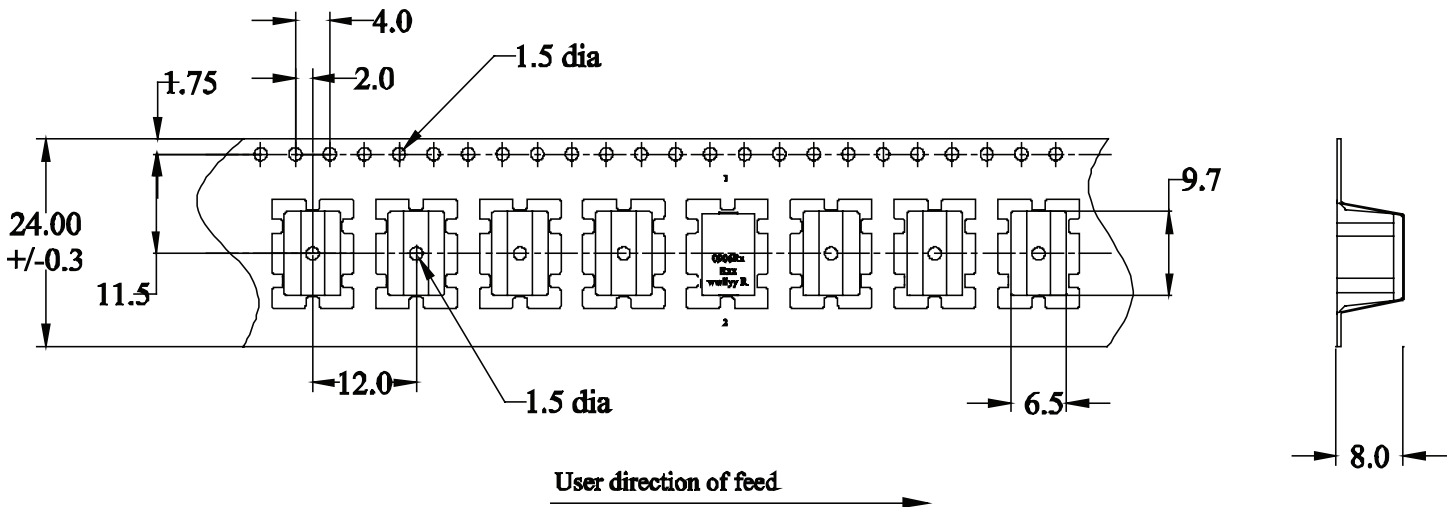


Supplied in tape-and-reel packaging, 600 parts on 13" diameter reel.


Temperature rise vs. total loss

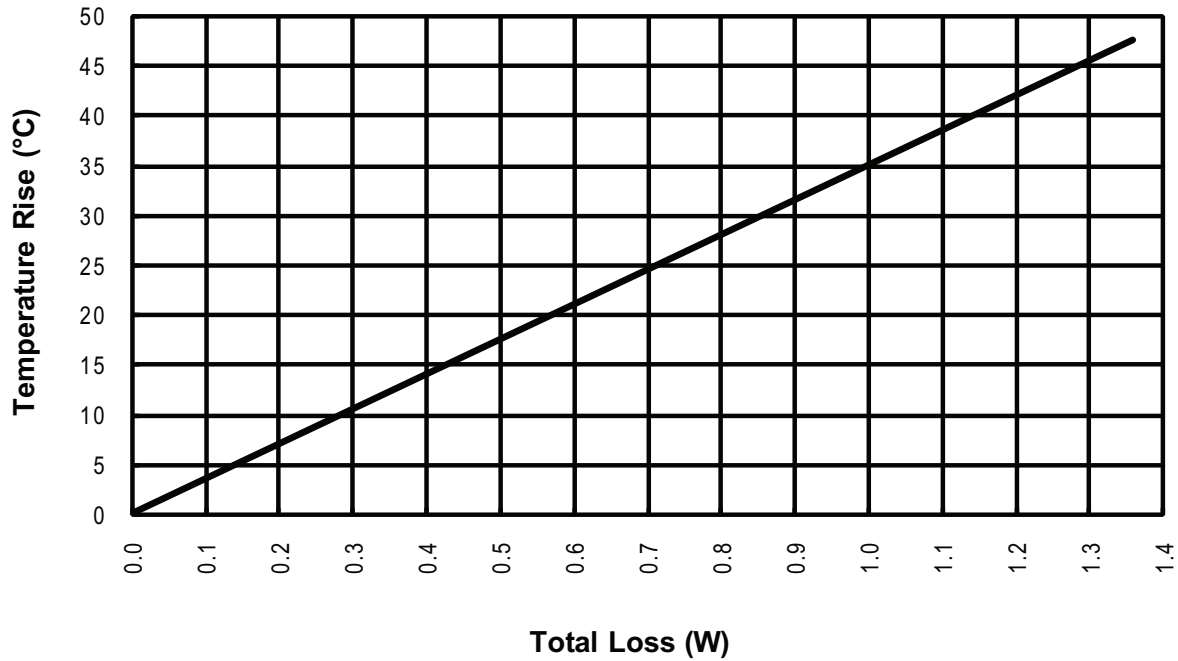

Inductance characteristics

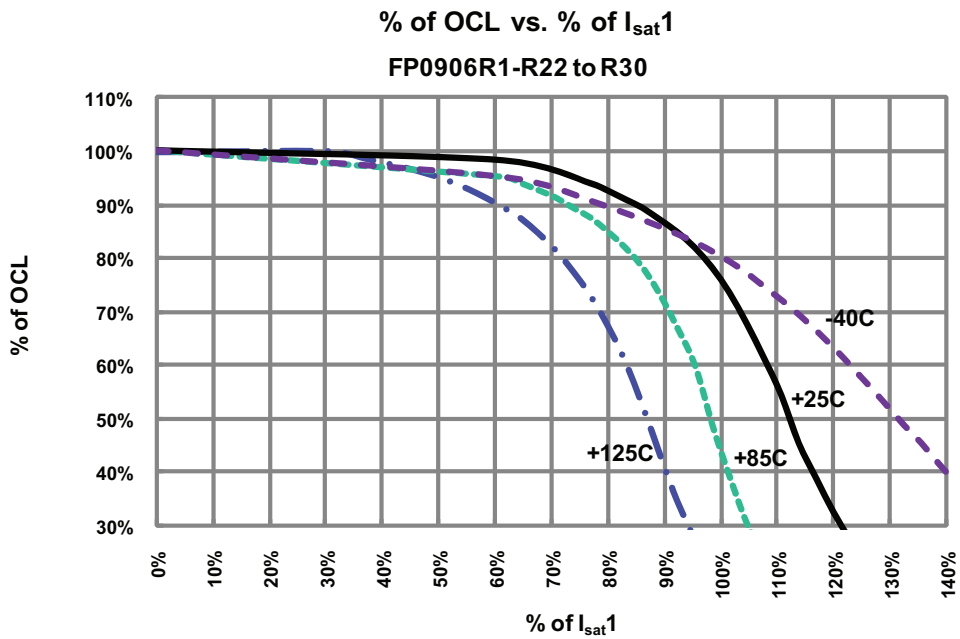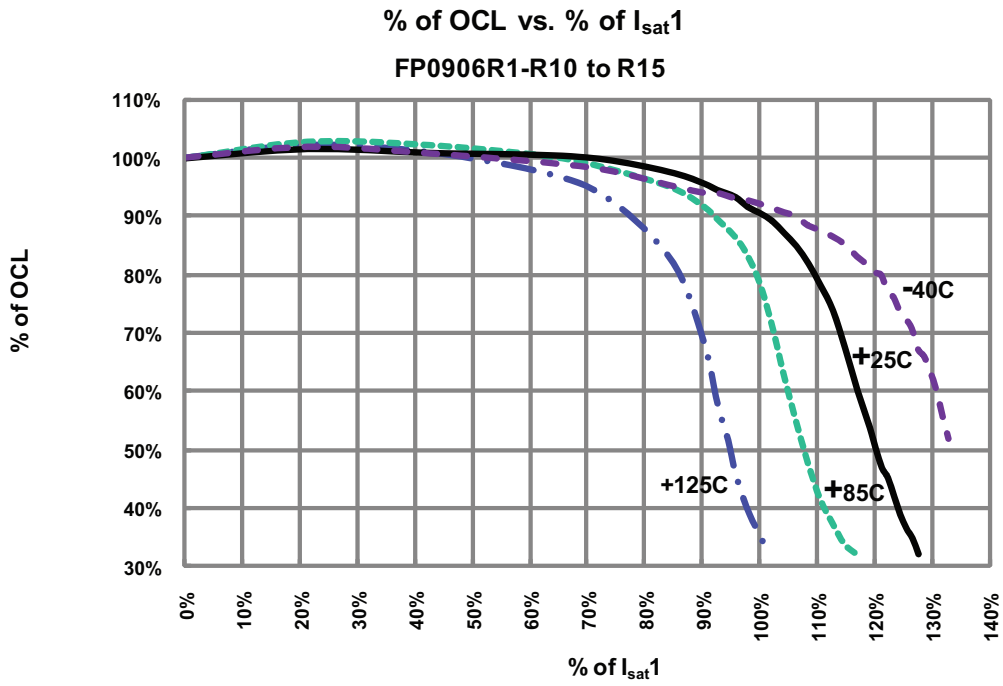

Core loss

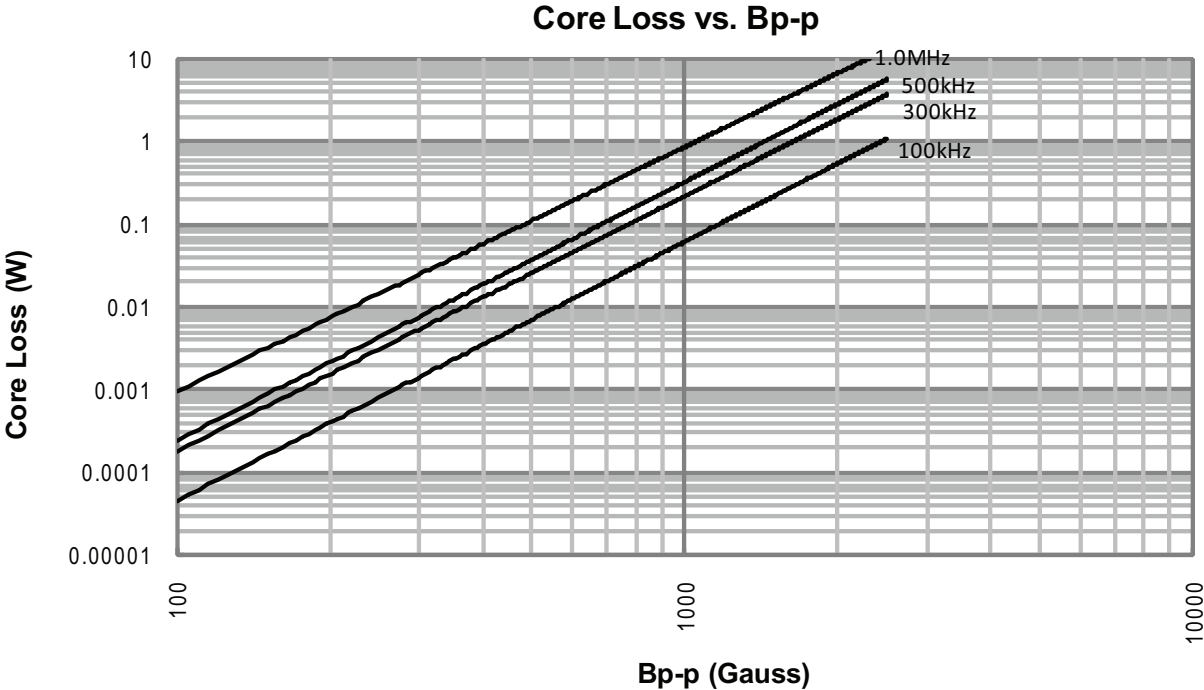

Solder reflow profile

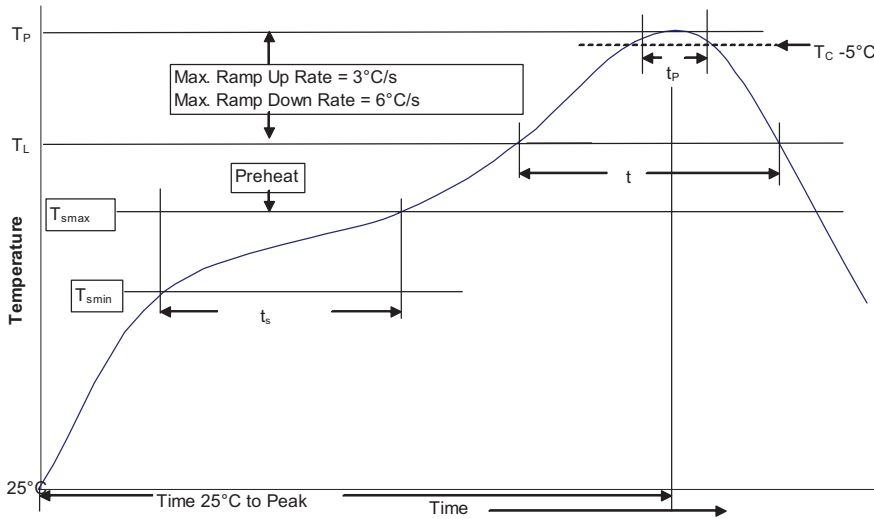


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume <350 mm ³	Volume ≥ 350 mm ³
<2.5 mm	235°C	220°C
≥ 2.5 mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume <350 mm ³	Volume $350 - 2000$ mm ³	Volume >2000 mm ³
<1.6 mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5 mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak	100°C	150°C
• Temperature min. (T_{smin})	150°C	200°C
• Temperature max. (T_{smax})	60-120 Seconds	60-120 Seconds
• Time (T_{smin} to T_{smax}) (t_s)	3°C/ Second Max.	3°C/ Second Max.
Average ramp up rate T_{smax} to T_p	183°C	217°C
Liquidous temperature (T_L)	60-150 Seconds	60-150 Seconds
Time at liquidous (t_L)	Table 1	Table 2
Peak package body temperature (T_p)*	20 Seconds**	30 Seconds**
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	6°C/ Second Max.	6°C/ Second Max.
Average ramp-down rate (T_p to T_{smax})	6 Minutes Max.	8 Minutes Max.
Time 25°C to Peak Temperature		

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Eaton's Electrical Group
Electronics Division
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Eaton's Electrical Group
Electronics Division
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Eaton's Electrical Group
Electronics Division
Burton-on-the-Wolds
Leicestershire, LE 12 5th UK
Phone: +44 (0) 1509 882 600
Fax: +44 (0) 1509 882 786

Eaton's Electrical Group
Electronics Division
Avda Santa Eulalia, 290
Terrassa, Barcelona 08223 Spain
Phone: +34-93-736-2813
Fax: +34-93-783-5055

Asia Pacific

Eaton's Electrical Group
Electronics Division
No.2, #06-01
Serangoon North Avenue 5
Singapore 554911
Tel: +65 6645 9888
Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton's Electrical Group
Electronics Division
114 Old State Road
Ellisville, MO 63021
United States
www.eaton.com/elx

© 2014 Eaton
All Rights Reserved
Publication No. 4407 — BU-SB14111
March 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Powering Business Worldwide