


KEMET Part Number: T110D476K035AS
(CS13BF476K, CSR13F476KL)



Tantalum, MnO2 Tantalum, Commercial Grade, KEMET, T110, 47 uF, 10%, 35 V, 800 mOhms

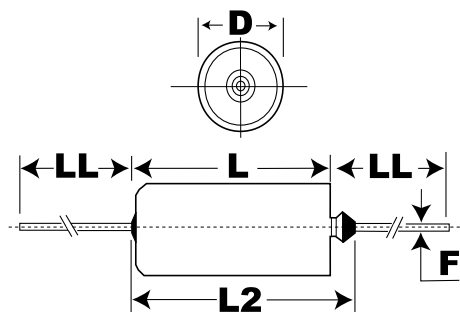

Dimensions	
D	8.92mm +/-0.25mm
L	19.96mm +/-0.79mm
L2	23.42mm
LL	38.1mm +/-6.35mm
F	0.64mm +/-0.05mm

Packaging Specifications	
Packaging:	Bulk, Tray
Packaging Quantity:	20

General Information	
Dielectric:	MnO2 Tantalum
Style:	Axial Hermetic
Supplier:	KEMET
Series:	T110
Description:	Axial, Solid Tantalum, Hermetically Sealed, Military (Non-ER), Polar
Features:	Polar
RoHS:	No
Termination:	Lead (SnPb)
Lead:	Wire Leads, Uninsulated
Construction:	Hermetic
Notes:	When Supplied On T&R Or Ammo, Lead Length Is Determined By Taping Specification

Specifications	
Capacitance:	47 uF
Capacitance Tolerance:	10%
Voltage DC:	35 VDC (85C), 28 VDC (125C Surge), 0.35 V (125C Reverse)
Temperature Range:	-55/+125C
Rated Temperature:	85C
Resistance:	0.8 Ohms (100kHz)
Leakage:	8 uAmps (25C)