

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0334670006](#)
Status: **Active**
Description: 2.54mm (.100") Pitch MX64™ Terminal, Gold (Au) Plating, 18-20 AWG, Left Reel Payoff, Also used with MX123 Female Receptacle Housing

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)


General

| | |
|------------------------------|--------------------------|
| Product Family | Crimp Terminals |
| Series | 33467 |
| Comments | Left Reel Payoff |
| Product Name | MX123 |
| Product Name | MX64™ |
| Physical | |
| Gender | Female |
| Material - Metal | Copper |
| Material - Plating Mating | Gold |
| Packaging Type | Reel |
| Plating min: Mating (µin) | 30 |
| Plating min: Mating (µm) | 0.76 |
| Termination Interface: Style | Crimp or Compression |
| Wire Insulation Diameter | 1.50-2.06mm (.059-.081") |
| Wire Size AWG | 18 |
| Wire Size AWG | 20 |
| Wire Size mm² | N/A |

Material Info

Reference - Drawing Numbers

Sales Drawing SD-33468-001

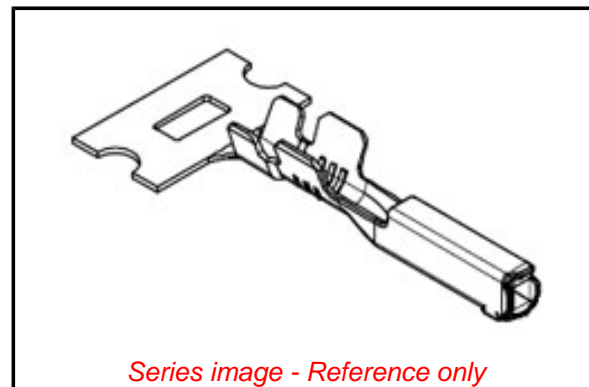

Series image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[33467](#) Series

Use With

MX64™ Sealed Single Row Crimp Housing [31403](#) , MX123 Female Receptacle Housing [34566](#) , [34576](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description | Product # |
|------------------------|----------------------------|
| FineAdjust™ Applicator | 0638673000 |
| Hand Crimp Tool | 0638114200 |
| Manual Extraction Tool | 0638131400 |