


Surface Mount Type

SP-CapSeries: **CS, CT, CX** (High Voltage Products)**■ Features**


- High voltage. (10 V to 35 V)
- Low profile (1.1 mm, 1.4 mm, 1.9 mm height)
- High ripple current (3.2 Ar.m.s.)
- RoHS directive compliant

■ Specifications

Series & Size Code	CS	CT	CX
Category Temp. Range		-55 °C to +105 °C	
Rated Voltage Range		10 V.DC to 35 V.DC	
Nominal Cap.Range	10 µF to 47 µF	15 µF to 68 µF	15 µF to 100 µF
Capacitance Tolerance		±20 % (120 Hz / + 20 °C)	
DC Leakage Current		I ≤ 0.3 CV (µA) 2minutes	
$\tan \delta$		≤ 0.06 (120 Hz/+20 °C)	
Surge Voltage	Rated Voltage × 1.25 [10 V.DC to 16 V.DC], × 1.15 [20 V.DC to 35 V.DC](15 °C to 35 °C)		
Endurance	After applying rated voltage for 2000 hours at 105 °C±2 °C, and then being stabilized at +20 °C, capacitor shall meet the following limits.		
	Capacitance change	±20% of initial measured value	
	$\tan \delta$	≤ 200 % of initial specified value	
	DC leakage current	≤ Initial specified value	
Moisture resistance	After storing for 500 hours at 60 °C, 90 %		
	Capacitance change of initial measurd value	10 V.DC to 35 V.DC +60, -20 %	
	$\tan \delta$	≤ 200 % of initial specified value	
	DC leakage current	≤ 300 % of initial specified value	

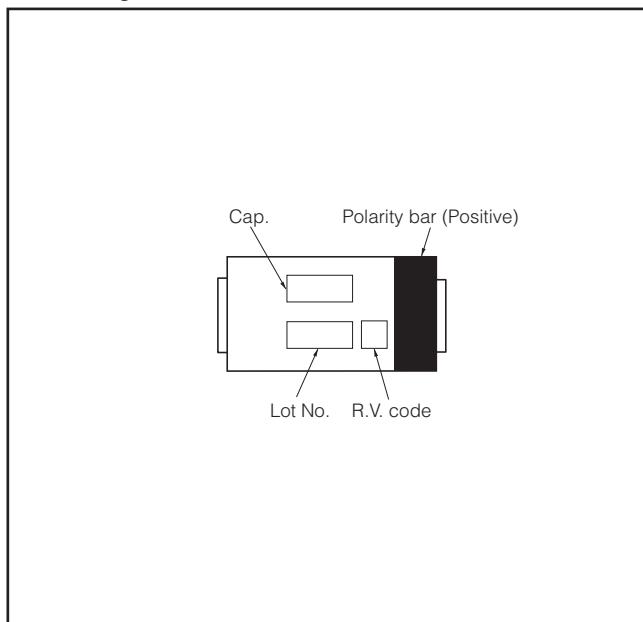■ Marking**■ Dimensions in mm(not to scale)**

(Unit : mm)

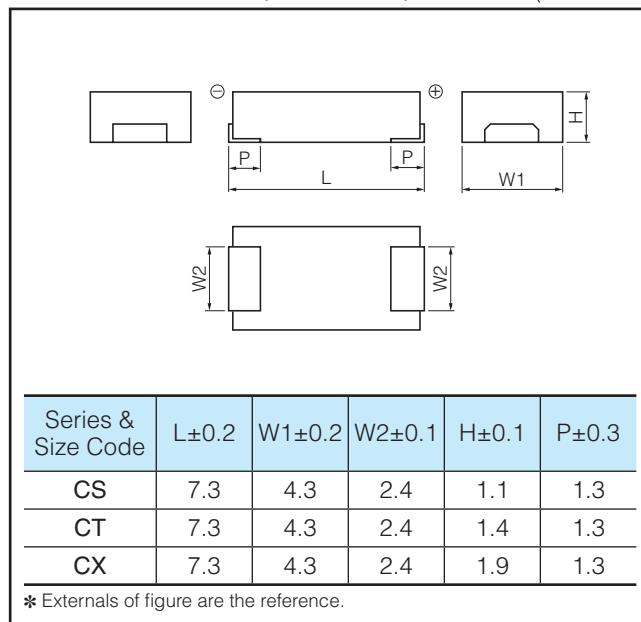

■ Standard Products

Series & Size Code	Rated Voltage (V.DC)	Capacitance ($\pm 20\%$) (μF)	Case Size			Specification		Part number	Reflow *3	<Standard>
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (m Ω max.)		*4 Min. Packaging Q'ty (pcs)	
CS	10	47	7.3	4.3	1.1	3.2	40	EEFCS1A470R	3500	
	16	15	7.3	4.3	1.1	3.2	40	EEFCS1C150R	3500	
		22	7.3	4.3	1.1	3.2	40	EEFCS1C220R	3500	
		33	7.3	4.3	1.1	3.2	40	EEFCS1C330R	3500	
	20	10	7.3	4.3	1.1	3.2	40	EEFCS1D100R	3500	
		15	7.3	4.3	1.1	3.2	40	EEFCS1D150R	3500	
		22	7.3	4.3	1.1	3.2	40	EEFCS1D220R	3500	
	25	10	7.3	4.3	1.1	3.2	40	EEFCS1E100R	3500	
		15	7.3	4.3	1.1	3.2	40	EEFCS1E150R	3500	
	35	10	7.3	4.3	1.1	3.2	40	EEFCS1V100R	3500	
CT	10	68	7.3	4.3	1.4	3.2	40	EEFCT1A680R	3500	
	16	47	7.3	4.3	1.4	3.2	40	EEFCT1C470R	3500	
	20	33	7.3	4.3	1.4	3.2	40	EEFCT1D330R	3500	
		47	7.3	4.3	1.4	3.2	40	EEFCT1D470R	3500	
	25	22	7.3	4.3	1.4	3.2	40	EEFCT1E220R	3500	
CX	10	15	7.3	4.3	1.4	3.2	40	EEFCX1V150R	3500	
		47	7.3	4.3	1.9	3.2	40	EEFCX1A470R	3500	
		68	7.3	4.3	1.9	3.2	40	EEFCX1A680R	3500	
	16	100	7.3	4.3	1.9	3.2	40	EEFCX1A101R	3500	
		15	7.3	4.3	1.9	3.2	40	EEFCX1C150R	3500	
		22	7.3	4.3	1.9	3.2	40	EEFCX1C220R	3500	
		33	7.3	4.3	1.9	3.2	40	EEFCX1C330R	3500	
		47	7.3	4.3	1.9	3.2	40	EEFCX1C470R	3500	
	20	68	7.3	4.3	1.9	3.2	40	EEFCX1C680R	3500	
		22	7.3	4.3	1.9	3.2	40	EEFCX1D220R	3500	
		33	7.3	4.3	1.9	3.2	40	EEFCX1D330R	3500	
		47	7.3	4.3	1.9	3.2	40	EEFCX1D470R	3500	
	25	56	7.3	4.3	1.9	3.2	40	EEFCX1D560R	3500	
		15	7.3	4.3	1.9	3.2	40	EEFCX1E150R	3500	
		22	7.3	4.3	1.9	3.2	40	EEFCX1E220R	3500	
	35	33	7.3	4.3	1.9	3.2	40	EEFCX1E330R	3500	
		15	7.3	4.3	1.9	3.2	40	EEFCX1V150R	3500	
	22	7.3	4.3	1.9	3.2	40	EEFCX1V220R	3500		

*1: Ripple current (100 kHz / +45°C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please contact us when 500 pcs packing is necessary.

Temperature Compensation Multipliers for Ripple Current

T ≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
1.0	0.8	0.5